


TVB-2408

TruVision HD-TVI Analog Bullet Camera, PAL, 3MPX, 2.8 to 12mm

Overview

The TruVision® HD-TVI Bullet Cameras by Interlogix deliver cost effective surveillance with 3MPX resolution HD-TVI technology over existing coaxial cable. The 3MPX HD-TVI cameras must be used with a 3MPX (or higher) resolution HD-TVI DVR and will not function in TVI mode on a lesser TVI Recorder. The bullet camera model also offers a familiar form factor that features a pre-installed wall mount with cable management and is IP66 rated for outdoor installation. With the ability to see in low-light conditions, the HD-TVI Bullet Cameras provide color images by day and black-and-white images in night-time applications (in conjunction with IR illumination). Ideal for new or existing projects, the HD-TVI Bullet Cameras are quick and easy to install and can help users stay within budget constraints without compromising security needs.

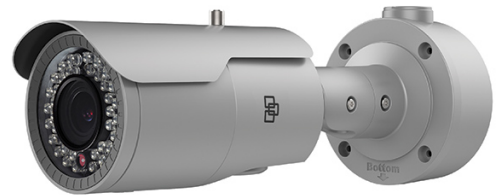

Standard Features

- 3MPX resolution
- HD-TVI technology for transmitting HD quality video over existing coax cable
- True day/night functionality and infrared illuminators with Smart IR function for capturing images in various lighting scenarios
- IR range of up to 40 m
- IP66 environmental rating
- Wide Dynamic Range (WDR), 120 dB
- 2.8 to 12mm motorized lens
- IP66 environmental rating
- 12VDC / 24VAC
- The 3MPX HD-TVI output is only compatible with 3MPX capable HD-TVI recorders such as the TVR 15HD

TVB-2408

TruVision HD-TVI Analog Bullet Camera, PAL, 3MPX, 2.8 to 12mm

Specifications

Camera	
Pick-up device:	1/3" Progressive Scan CMOS
Effective pixels (H x V):	2052 x 1536
Resolution:	3 MPX
Sync. system:	Internal
S/N ratio:	More than 52 dB
Electronic shutter:	1/25 to 1/50,000 s
Color sensitivity:	0.01 lux @ f1.2 (AGC On)
B/W sensitivity:	0 Lux with IR on
Video output:	3MPX TVI or 960H Analog
IR distance:	Up to 40 m
Lens type:	2.8 to 12mm motorized
Wide dynamic range:	WDR
Digital noise reduction:	DNR
OSD:	Yes
Electrical	
Power source:	12VDC / 24VAC
Power consumption:	12VDC: 9W ; 24VAC: 12W
Current:	12VDC: 750 mA ; 24VAC: 400 mA
Environmental & Physical	
Weight:	1083.2 g (2.93 lbs)
Dimensions:	301.1 x 110 mm (11.85 x 4.33 in.)
Operation temperature:	-40 to +60° C (-40 to +140° F)
Environmental rating:	IP66

Ordering Information

Part No.	Description
TVB-2408	TruVision HD-TVI Analog Bullet Camera, PAL, 3MPX, 2.8 to 12mm motorized lens

